



Works at: Plot no. 10 Guru Gajanan Ind. Vilholi-Nashik (MH)  
Email: rockmanequipments@gmail.com | +91 7767994130 | 9921496604

## **QUOTATION**

**Ref: REQ/265/2025-26**

**Date: 26-05-2025**

**To,**

**M/S:**

**ADDRESS: Pune**

**KIND ATT: Mr. Pritam Ghutal**

**SUBJECT: -QUOTATION FOR ROCKMAN SAND MAKING PLANT WITH COMBINATION OF VSI 250+SCREEN-2064D+WASHX-120+HOPPERS+CONVEYORS SYSTEM.**

Dear Sir,

Based on your enquiry & our detail telephonic discussion had, we are pleased to furnish our Techn-commercial Offer As under we enclosed herewith **(VSI-250+SCREEN-20X6X4D+WASHX-120)**;

**Annexure: -**

- Basic Parameters
- Technical Specifications.
- Scopes of Supply & Price.
- Power Requirements.
- Commercial Terms & Conditions.
- Purchasers Responsibilities.

We would like to have a discussion on the subject to further emphasize to your good selves at the soonest. We look Forward for the meeting and the association with your esteemed organization. We hope you will find our proposal in line with your requirement; however, should you require any further Clarifications. Please feel free to get back to us for our immediate compliance. We always assure you of our utmost co-operations and best services.

Thanking you and assuring our best services always, we remain,  
Yours Truly,



**For, ROCKMAN EQUIPMENTS**


## **SAND MAKING PLANT**

**(VSI-250+VIBRATING SCREEN-2064D+WASHX-120+HOPPER+CONVEYORS SYSTEM.)**

### **1. BASIC PARAMETERS**

- In-feed material : Black Basalt
- Bulk Density :  $1.6\text{T/M}^3$
- Inherent Moisture % : Not Known
- Sieve Analysis Report : Not Known

### **2. PLANT DESCRIPTIONS**

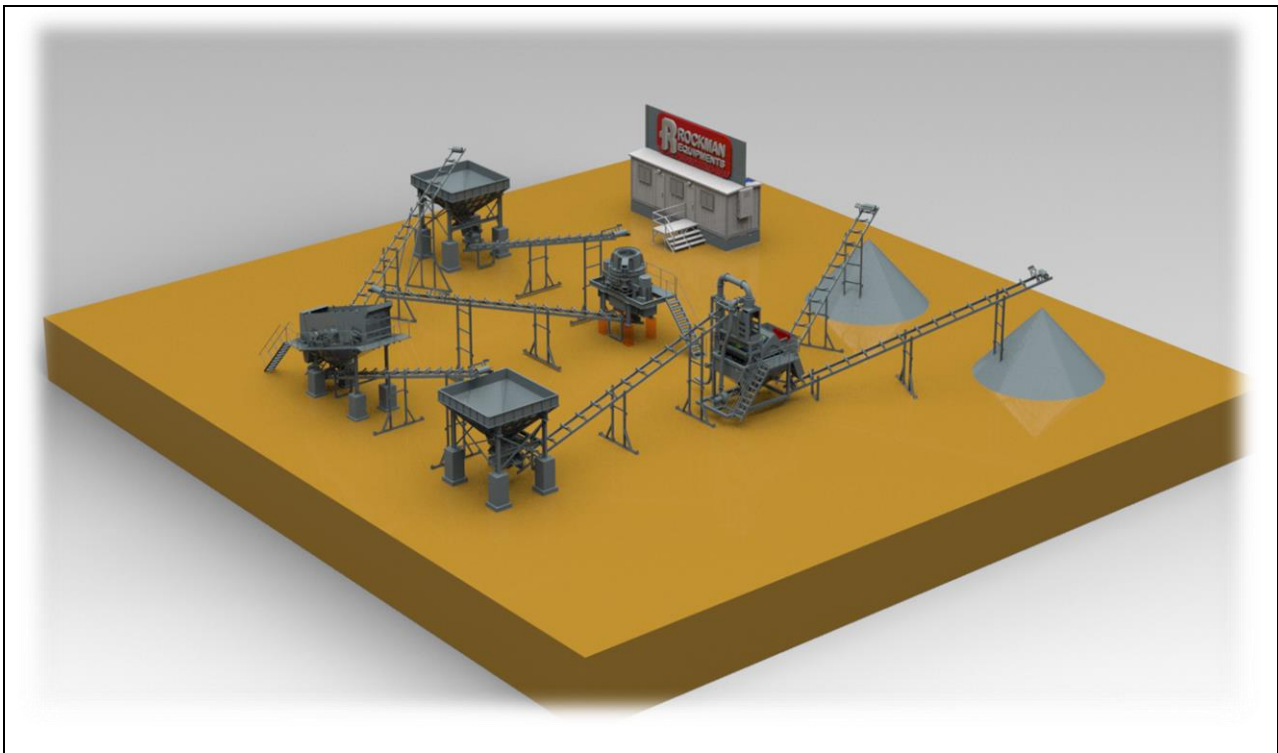

## **TECHNICAL SPECIFICATION**

### **1. Vibro-Pan feeder (02No.)**

ROCKMAN Vibro-feeder is fitted below Feeding Hopper for controlling feed of the VSI and Prowash.

Type	Electro-mechanical
Size	800 mm Wide x 1800 mm Long
Drive	Vibro motor
Motor	2Hp x 2No, 1440rpm

### **2. Vertical Shaft Impactor**

ROCKMAN VSI crusher is the ideal machine for producing high quality aggregates / M or P sand.

Model	RVSI-R250
Type	Rock on Rock type crusher
Max. Feed size	0-32 mm
Tips	Hi-grade Tungsten carbide
Bearings	Cylindrical Roller bearings, Deep Groove Ball Bearing.
Lubrication	Grease
Motor	150Hp x 2No, 1440 rpm. TEFC sq. cage Induction motor.

### **3. Circular Motion Screen**

ROCKMAN Heavy duty inclined vibrating screen with robust structure for maximum capacity and efficiency

Model	RCS-20X6X4Deck
Type	Heavy duty inclined circular motion screen
Size	1.8-meter-Wide x 6.0meter Long
Frame	Heavy duty, steel plate in welded construction
Eccentric / Concentric Shaft	Heavy duty, Carbon steel
Bearings	Heavy duty, self-aligning spherical roller bearings
Motor	25HP, 1440 rpm TEFC sq. cage induction motor
Type of Starter	DOL starter

### **4. Prowash (Hydro-cyclone):**

ROCKMAN Prowash ideal machine for producing high quality M and P sand.

Model	RWASHX-120
Hydro-cyclone Diameter	400mm
Dewatering Screen	2.2m x 1.9m
Slurry Pump Size	Suction 4" x Delivery 3"
Slurry Pump Capacity	120cum/hr
Slurry Pump Motor Power	20HP, 1440 rpm
Feeder Motor power	05 x 02, 960 rpm

**A. SCOPE OF SUPPLY & LIST OF EXCLUSION**

SL NO.	EQUIPMENTS / COMPONENTS	QUANTITY
01	Storage Hopper 40cum	02 No.
02	Vibro-Pan Feeder 0818	02 No.
03	Vertical Shaft Impactor 250	01 No.
04	Vibrating Screen 20x6x4Deck (Circular motion screen)	01 No.
05	Prowash (Washx120)	01 No.
06	Motors For Equipment's	01 Lot.
07	Complete Plant Belt Conveyor	07 No.
08	Complete Plant Cables	01 Set.
09	Electrical Panel	01 Set.
10	Suspended Magnet For VSI	01 No.
11	Hard Copy Plant GLA Drawing for Civil Foundation	01 Set
12	E & C Team for Supervision	---

**Exclusion & Customer's obligation: -**

1. All civil works including ramp, retaining wall, Tunnel, approach roads, MCC room etc, Site leveling etc.
2. Soil Testing and Supply of Water & Air. Approval of Plant Layout and Clearance from Government Authority.
3. Incoming Power supply. Incoming Power cables earthing arrangements & supply of all control cable. Generating Set for the Plant.
4. Cranes for loading / Unloading & erection of plant / equipment and Erection & Commissioning. Dust Extraction system, Water Spraying / Sprinkling, Ventilation system, Insert plates. Non-Skilled labors during erection & commissioning of plant
5. Boarding & Lodging and Local Transportation for our visiting Engineers/Supervisors at site.
6. Co-ordination with any third party other than our Vendor/sub vendor.
7. Any other items not mentioned in our scope of supply.

## B. EX-WORK PRICE SPECIFICATION

Design, Engineering, Manufacturing & Supply of Following Equipment & Components.			
SL#	EQUIPMENTS/COMPONENTS	QTY	TOTAL PRICE [INR]
01	<b><u>SURGE HOPPER:</u></b> Size: 4MX4MX2.5M -40Cum Capacity, Heavy duty steel plate, ISMC & ISMB Fabricated Steel Column.	01	1,50,74,826/-
02	<b><u>VIBRO-PAN FEEDER 0818</u></b> Heavy duty vibrating pan feeder is provided below Surge hopper for controlling feed VSI machine, with structure, Vibro-Motor recommended 02Hp x 2No, 1440rpm	01	
03	<b><u>VSI MODEL-RVSI-R250:</u></b> Throughput Capacity: 250TPH, Type-Rock on rock type, Lubrication-Greased based, Maxfeed size- 0-32mm, Motor required: - 150Hp x 2No, 1440rpm Type of Starter-Star Delta.	01	
04	<b><u>VIBRATING SCREEN -20X6X4-DECK:</u></b> Size-1.8mtr x 6.0 mtr x 4 deck Heavy Duty: All deck clamping wire mesh type arrangement. Including ISMC Chassis with legs, All Oversize & undersize Chutes, platform, railing, Ladder, rubber pads etc. with Motor Required 25Hp, 1440rpm	01	
05	<b><u>SURGE HOPPER:</u></b> Size: 4MX4MX2.5M -40Cum Capacity, Heavy duty steel plate, ISMC & ISMB Fabricated Steel Column.	01	
06	<b><u>VIBRO-PAN FEEDER 0818</u></b> Heavy duty vibrating pan feeder is provided below Surge hopper for controlling feed VSI machine, with structure, Vibro-Motor recommended 02Hp x 2No, 1440rpm	01	
07	<b><u>PROWASH (HYDRO-CYCLONE)-</u></b> Type: Hydro-cyclone size: 400mm, Dewatering screen: 2200x1930mm, Vibro-motors: 5Hp x 02, 960rpm Slurry Pump: 4' x 3' & Motor: 20Hp, 1440rpm with heavy duty structure.	01	
08	<b><u>COMPLETE PLANT CONVEYORS</u></b> Included: Drum pulley, Impact Idler, Guide Rollers, Belt Adjusting Frame, ISMC Stands, SMSR Gearbox & Standard Accessories Complete set. Suitable Electric Motor, pulleys and belts <ul style="list-style-type: none"> <li>800mm wide conveyors: 03 Nos.</li> <li>600mm wide conveyors: 04 Nos.</li> <li><b>Total Meter = 110m</b></li> </ul>	07	

09	<b><u>MOTORS FOR EQUIPMENTS (Weg Make): -</u></b> a) 150HP x 2 NO/4POLE-VSI a) 25HP/4POLE-SCREEN b) 2HP/4POLE-VIBRO PAN FEEDER	02 01 04	
10	<b><u>CABLES</u></b> Complete plant cables, terminal connection, and cable lying from MCC Panel to end motor.	01 Lot	
11	<b><u>ELECTRICAL PANEL</u></b> MCC Panel for all connected motor, Junction box for VSI crusher, DOL starter for all screens, feeder and all conveyors.	01 Lot	
12	<b><u>SUSPENDED MAGNET FOR VSI</u></b> Type-Suspended Magnet, Hanging Arrg-Suspended with wire rope	01	
13	<b><u>DESIGN ERECTION &amp; COMMISSIONING</u></b> Commissioning and entire plant fitting, Trial, all required material list providing, etc.	----	
		<b>TOTAL</b>	<b>1,50,74,826/-</b>
		<b>GST @18%</b>	<b>27,13,469/-</b>
		<b>GRAND TOTAL</b>	<b>1,77,88,295/-</b>

### **C. POWER REQUIRMENT**

#### **I. Electrical Power Requirement for Sand Plant.**

<b>S. No</b>	<b>Equipment Description</b>	<b>Installed power (kW)</b>
1.	Vibro-Pan Feeder Below hoppers 02No.	6.0
2.	Vertical Shaft Impactor	224.0
3.	Circular Motion Vibrating Screen	19.0
4.	Pro Wash	30.0
5.	Belt conveyors	32.0
	<b>Total installed Power (KW)</b>	<b>311.0</b>

## **D. COMMERCIAL TERMS & CONDITIONS**

### **GENERAL**

These terms & conditions of sale shall govern any offer made by ROCKMAN to, or any sale entered into by ROCKMAN with, any purchase of equipment. Any sale by **ROCKMAN** is expressly subject to your full assent and satisfaction and acceptance to the terms and conditions mentioned below.

### **PRICES**

Unless otherwise specified, Our Price for Design, Engineering, Manufacturing & supply for only One [1] No. QUANTITY as mentioned above.

### **PRICE BASIS**

The above prices are on the basis of Ex-Works NASHIK basis. Packing & Forwarding, Demurrage/Wharf age, unloading at buyer's site are all extra at actual to be borne by the buyer.

### **CENTRAL EXCISE DUTY**

Presently Not Applicable. However, should that be imposed during pendency of the order and the same will be applicable to your account as extra subject to changes in rules if any. Any change in duty Rate by Govt. will change the duty amount accordingly.

### **G.S.T.**

Presently G.S.T. @ 18.0% will be charged extra.

### **PAYMENT TERMS\*\*\***

❖ As per following schedule: -

1. 70% Advance along with Techno-commercially cleared & confirmed Purchase Order.
2. Second payment 30% of the total order value should be paid in the date mutually agreed between. Before x-work Dispatched.
3. In case of Non-compliance or violation of Payment terms we reserve the right to sale out, divert, dispose the Plant equipment and advance amount paid by you may be forfeited.
4. Payment will be acceptable to us by A/c Payee Cheque/ Demand Draft / RTGS / NEFT. Banking Charges / Finance Commission in case of Finance through Bank or Equipment Finance Company shall be payable by you.
5. All Payment made at the time of order booking shall be retained as security deposit and shall be adjusted against supplies made.
6. Timely payment is the essence of the contract, which is entered into on the understanding that the payment will not be delayed on any account. If the payment is against Pro-forma Invoice/Bill; interest @ 24% per annum will be charged extra if payment is not released within one week of issue of Pro-forma Invoice / bill.

### **SUPERVISION OF ERECTION AND COMMISSIONING CHARGES FOR THIS PLANT.**

- Man, hour charges for Supervision of Erection & Commissioning are included.
- To & FRO Journey Ticket for our Visiting Engineers / Technicians to be provided by us at our cost.
- Suitable Lodging & Boarding and Local Transportation for our visiting Engineers / Technicians to be provided by you at your cost & risk along with medical facility if any.
- All the charges for Erection and commissioning are based that suitable mobile Crane with Slings, Chain Pulley Block, Welding Machine along with welding Rods, Gas Cutter Set, Unskilled labor to be provided at site free of charge of any kind from buyer's side.

### **TRANSPORTATION AND TRANSIT INSURANCE**

Transportation charges from our works to your site and transit insurance shall be paid by you. Our liability is limited to load the material securely and safely for your destination, but transit risk if any arisen shall be taken care by you.



#### **DELIVERY SCHEDULE**

- Dispatches will be COMPLETED within 45-60 Business days after & from the date of receipt of both technically and commercially clear order and advance Payment & Delivery Order from your Banker / Equipment Finance Company subject to Force Majeure Clause as mentioned below. Written order [mutually agreed upon the terms & conditions] ALONG WITH Advance payment will be termed & considered as confirmed order.
- In case of Finance from any Banker or Equipment Finance company, Delivery shall be accountable from the date of receipt of Techno-commercially cleared D.O. [Delivery Order] from the Banker / Finance company.
- Dispatches shall be commenced in part against Pro-forma Invoices on receipt of payment for the respective Equipment's/ Components.

#### **EFFECTIVE DATE OF ORDER**

Effective Date of the order is the date of our acceptance of your Purchase Order or receipt of the Advance payment/ opening of LC whichever is later.

#### **VALIDITY**

Our offer will remain valid up to 30 from the date of its submission. However, the same may be further revalidated subject to our written confirmation only.

#### **PLACEMENT OF ORDER**

- Your Techno-commercially confirmed Order shall be placed in favor of **M/s ROCKMAN EQUIPMENTS; Nashik, Maharashtra [India]. GSTIN: 27ABEFR3139E1ZB**
- **ACCOUNT DETAILS: M/S ROCKMAN EQUIPMENTS**  
**A/C NO. 50200065492773**  
**IFSC. HDFC0007276**  
**BRANACH. KAMATWADE, NASHIK**

#### **ORDER CANCELLATION / TERMINATION CLAUSE**

- Order once placed shall not be cancelled or terminated except upon payment of Seller's Loss, Damage and Expenses arising from such Cancellation or Termination. In the event of cancellation of order, security deposit paid as an advance is likely to be forfeited.

#### **INSPECTION CLAUSE**

We will be notifying you in writing 7 days prior to the schedule date of dispatch to inspect your ordered plant/equipment at our works at **Nashik** works at your own cost. In the event you fail to carry out the inspection as per our call, automatically it will be deemed that inspection clause is waived. Any inspection carried out at your site will not be acknowledged and is null.

#### **STOCK HOLDING CHARGES/DEAD RENT**

It may please be noted that, in the event full payment is not made as per schedule time and material is not lifted in time, Stock Holding Charges will be charged in our Invoice @ 24% per Annum for the delayed period vis-à-vis the actual delivery schedule.

#### **PRICE ESCALATION CLAUSE**

In the event any technical changes are required by the buyer subsequent to the issuance of Order Acceptance by us, the buyer has to accept the additional cost implication, if any.

If delivery is more than 6 months and the price of our raw material is changed more than 3%, the same shall cast price implication and should be payable by buyer extra.

#### **FORCE MAJEURE CLAUSE**

Our offer is subjected to Force Majeure conditions viz; natural calamities (Acts of God), riot, and strike within the country and overseas, shipment delays from overseas suppliers, as some of the major equipment incorporated in our system are imported. If at any time after the effective date during execution of Order, the performance in whole or part of the Purchaser's and/or ours obligation (s) is/are prevented, affected, delayed by reasons of one or more of the force Majeure events as acts of God, war, civil commotion, sabotage, embargoes, internal unrest, floods,

explosion, quarantine restrictions, port congestion, seizure or sinking of ships, strikes, lockouts, epidemics, earthquake, fire, voltage fluctuation, power cuts and interruptions exceeding 10 days, changes in Governmental rules and regulations or omission affecting works, any other conditions beyond our control, when occurring at our/our sub-contractor's works and/or at project site, the agreed time of completion of the obligation shall be extended. Neither party shall be deemed to be in default of its obligations whilst performance thereof is prevented by Force Majeure, and thus the time limits for the performance of such obligation shall accordingly be extended by a period equal to that during which the Force Majeure prevails.

#### **WARRANTY**

- The Equipment shall be under warranty for a period of 12 months from the date of commissioning by ROCKMAN report or 18 months from the date of shipment/dispatch, whichever is earlier, for any manufacturing defect or workmanship resulting in non-performance of the equipment on sole discretion of ROCKMAN. This warranty is subject to following operative and maintenance conditions.
- Crushers and all other equipment are operated and maintained as per our Instruction Manuals. No changes are made in the plant circuit without discussing and approval from us in writing. Buyer is/shall abide by that; Crushers are choking fed. Stones are dry and Usage of genuine [OEM] Wear & Spare Parts supplied by us.
- The capacities indicated in the Flow sheet are based on assumed Feed Gradation and indicated on the Flow Sheet. Customer to maintain up to date Log book and also to establish written communication with us based on which our engineers will visit the site regularly and assess the conditions at which the machines are being operated and suggest corrective measures, if required, to maintain/improve the efficiency of the plant. As Screen efficiency plays an important role, any variation in the same due to any reasons would affect the gradations. Any alterations on the Screens should be carried out only after obtaining our approval in writing.
- However, This Warranty under any circumstances will not cover any Rubber Item, Plastic Item, Wear & Tear parts, Bearings, Electricals of all sorts, Hydraulic Items, Bought out items, Liners of all type, Wire mesh Screen, Cables etc. Our OEM warranty from our vendors will be passed on to the customers as per their policies.
- Specific Warranty if any required, the same will be discussed and will incorporate on mutually agreed terms basis hereinafter our Conditions Sales to be signed by both the parties [Buyer & Seller] as an acceptance. No warranty in anyway given for production or performance of the plant of machine, since it depends on various external factors which are beyond our control.
- Any damage due to transit, bad storage, misuse, mishandling of the equipment or operation of the plant by unqualified personnel is not covered under warranty.

#### **LIMITATION OF LIABILITY**

We shall under no circumstances be liable for loss of production, loss of profit and other indirect and consequential losses whatsoever.

#### **SPECIFICATIONS**

- Specifications, dimensions, designs, descriptions, etc. mentioned in this proposal are not binding in minute details and may be subject to minor alterations without affecting the specified performance, during detailed engineering without any prior notice to the customer.
- Weight of any machine or its part if indicated in proposal are approximate only for design of foundation, shed or transportations estimate, however the final weight of the machine or part can vary majorly after detail engineering in the best interest of machine performance.
- The weight has no co-relation with the price of machine quoted.
- Further, please note that the layout, conveyor and structural estimates have been prepared considering flat ground. Any increase due to change in layout depending upon the actual contour of the ground shall be to Buyer's account on proportionate basis.

#### **CONCLUSIONS OF THE SALE:**

The sale as well as any amendment to the sales agreement shall be valid only if and when the order or the amendments as the case may be has been unrestrictive acceptance in writing by us.

**INTELLECTUAL AND INDUSTRIAL PROPERTY RIGHTS.**

The technology and knowhow whether patented or not embodied in the products as well as all rights of industrial and / or intellectual property attached to the products shall remain the sole property of ROCKMAN. Buyer is granted the non-exclusive rights. ROCKMAN shall not be bound to supply any design & / or manufacturing documents the product as well as source for even the products are delivered with installation drawing.

**RIGHT OF LIEN**

We reserve the right of lien on the Plant and Machinery, equipment, supplied by us to our clients in case of any payment is due to us from buyer. The right of lien shall continue until all the payments due to us from the buyer are paid full and final. The buyer shall not put into commercially operation or beneficial uses of plant and machinery, until the lien is withdrawn by us in writing, the customer cannot hypothecate or mortgage or change of pledge or sale off, enter into agreement of sale or do such things which effects our lien on the plant machinery until all the dues pending to us are paid in full.

**UNDERTAKING OF AFTER-SALES-SUPPORT IF REQUIRED**

As mutually agreed, upon, we will undertake of Operation & Maintenance of aforesaid Crushing Screening plant on following terms and conditions

**Operation & Maintenance including Wear & Spare Parts** Cost per ton basis will be as follows [Excluding Electric Bill / Fuel / Local Liabilities if any]:

- **Up to 0-40mm regular production**
- That Agreement for Operation & Maintenance of Crushing Plant will be executed separately in 15 business days from the date of commissioning under our associate concern or Third Party for which we at ROCKMAN will take whole & sole responsibility to fulfill the requirement of Consumables at site in time.
- That The Bill of Operation & Maintenance Charges will be raised fortnightly basis and the same will required to be paid/ cleared by you immediately for smooth operation.
- That, you will provide suitable Accommodation & Security for our Operation Team at Site at your cost.
- Capacity of the Plant, means throughput capacity (Main Feed + Recirculation Feed)

**DISPUTE RESOLUTION & ARBITRATION**

All the disputes or difference whatsoever arising between the parties out of or relating to the meaning, and/or operation of this order and/or breach of order thereof shall be settled through the negotiations between both the parties, and thereafter in accordance with the Indian Arbitration Act 1996. The courts NASHIK [MAHARASHTRA] shall have jurisdiction in the matters arising under this order.



**For ROCKMAN EQUIPMENTS.**